


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes




PART MUST INSERT FULLY TO SURFACE A IN RECOMMENDED GRID .020 SQ.(10)

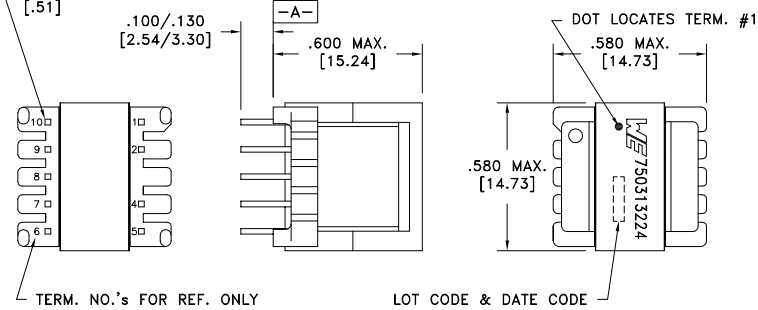

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	6-5 @20°C	1.65 ohms ±10%
D.C. RESISTANCE	9-10 @20°C	3.50 ohms ±10%
INDUCTANCE	6-5 100kHz, 100mVAC, Ls	1.00mH ±10%
LEAKAGE INDUCTANCE	6-5 tie(9+10), 100kHz, 100mVAC, Ls	40uH max.
DIELECTRIC	6-9 625VAC, 1 second	500VAC, 1 minute
TURNS RATIO	(6-5):(9-10)	2:1, ±1%

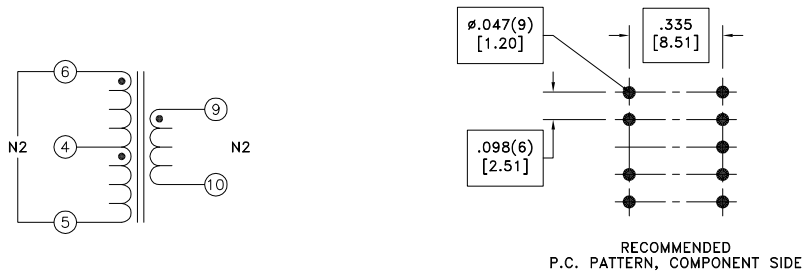

GENERAL SPECIFICATIONS:  
Safety Standard Undefined.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0816 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.001 [.03]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750313224</b>
6A	7/12	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750313224	SPECIFICATION SHEET 1 OF 1