



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

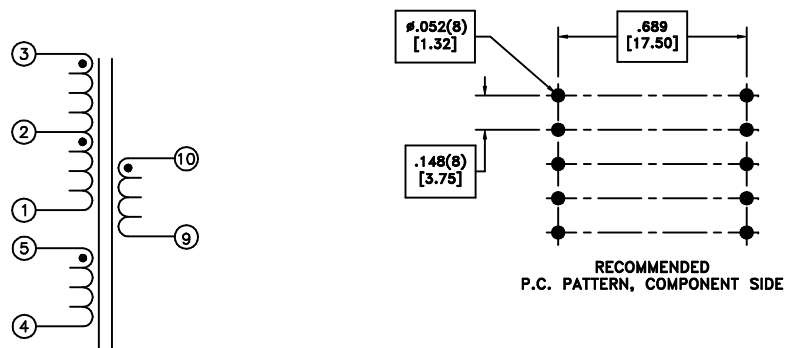

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C,	2.30 ohms max.
D.C. RESISTANCE	5-4 @20°C	0.28 ohms max.
D.C. RESISTANCE	10-9 @20°C,	0.34 ohms max.
INDUCTANCE	1-3 100kHz, 100mVAC, Ls	3mH ±7%
INDUCTANCE	1-3 100kHz, 100mVAC, Ls tie(4+5+9+10)	15uH max
INDUCTANCE		
DIELECTRIC	1-10 1250VAC, 1 second tie(3+4)	
TURN RATIO	(3-1):(5-4)	6.67:1, ±2%
TURN RATIO	(3-1):(10-9)	2.40:1, ±2%
TURN RATIO		

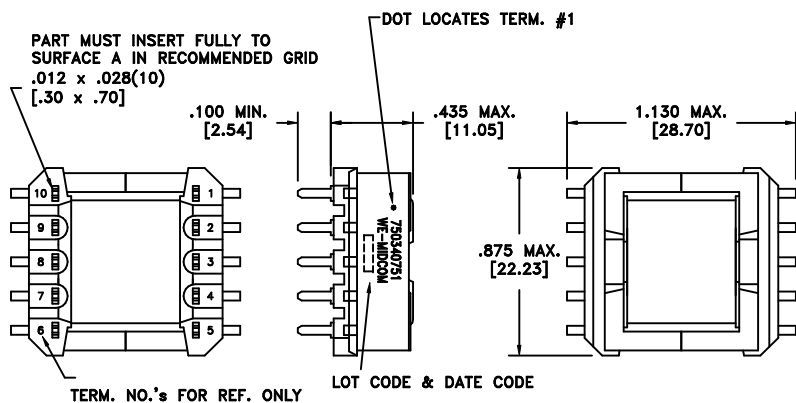

REV.	DATE
02	12/10

Packaging Specifications
 Method: Tape & Reel
 PKG-0527
 www.midcom-inc.com

Unless otherwise specified:
 Tolerances: Fractions: ±1/64
 Angles: ±1° Decimals: ±.005[.127]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: 750340751

Midcom WE
 www.midcom-inc.com

REVISIONS: SEE SHEET 1

DRAWING NO.
750340751

SCALE --- SHEET 2 OF 5