
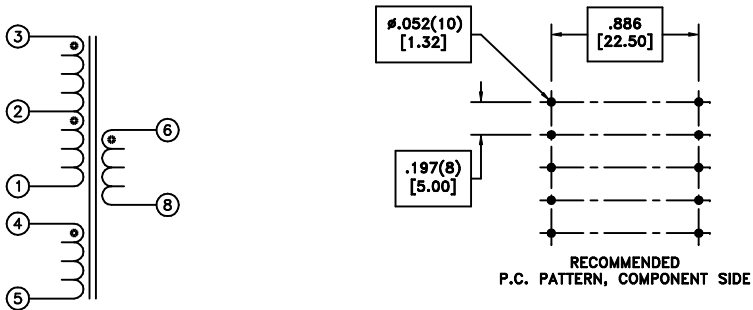


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

more than you expect

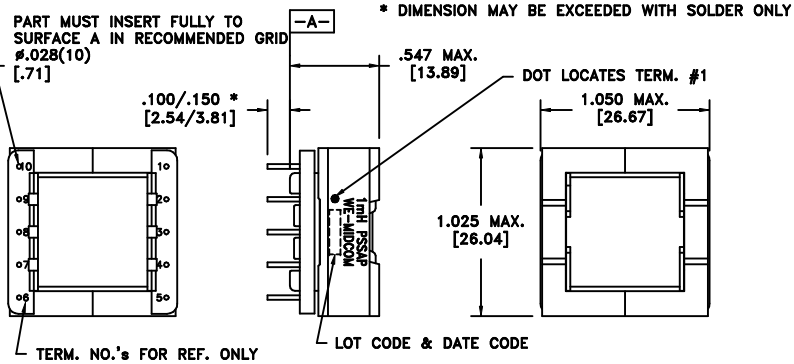

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.61 ohms max.
D.C. RESISTANCE	4-5 @20°C	0.26 ohms max.
D.C. RESISTANCE	6-8 @20°C	0.09 ohms max.
INDUCTANCE	1-3 100kHz, 200mVAC, Ls	1.00mH ±5%
LEAKAGE INDUCTANCE	1-3 tie(6+8+4+5), 100kHz, 200mVAC, Ls	10uH max.
DIELECTRIC	1-8 tie(3+4), 1800VAC, 1 second	-
TURNS RATIO	(3-2):(4-5)	1.5:1, ±2%
TURNS RATIO	(3-2):(6-8)	1.5:1, ±2%
TURNS RATIO	(3-2):(2-1)	1:1, ±2%

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tray PKG-0819 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Decimals: ±.005 [.13] Fractions: ±1/64 Footprint: ±.001 [.03]	DRAWING TITLE TRANSFORMER	PART NO. 750340772
6A	8/11	SEE REVISION SHEET FOR REVISION LEVEL	CONVENTION PLACEMENT	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750340772	compliant RoHS SPECIFICATION SHEET 1 OF 1