


| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn96%, Ag4% | Yes | Yes |

more than you expect



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER | TEST CONDITIONS | VALUE |
|--------------------|--|----------------|
| D.C. RESISTANCE | 3-5 @20°C | 1.88 ohms max. |
| D.C. RESISTANCE | 2-1 @20°C | 4.15 ohms max. |
| D.C. RESISTANCE | 7-9 @20°C | 0.50 ohms max. |
| INDUCTANCE | 3-5 50kHz, 100mVAC, Ls | 1.2mH ±10% |
| LEAKAGE INDUCTANCE | 3-5 tie(1+2, 7+8+9), 100kHz, 100mVAC, Ls | 14uH max. |
| DIELECTRIC | 1-9 tie(2+3), 4000VAC, 1 second | - |
| URNS RATIO | (3-5):(1-2) | 2:1, ±2% |
| URNS RATIO | (3-5):(7-9) | 3:1, ±2% |

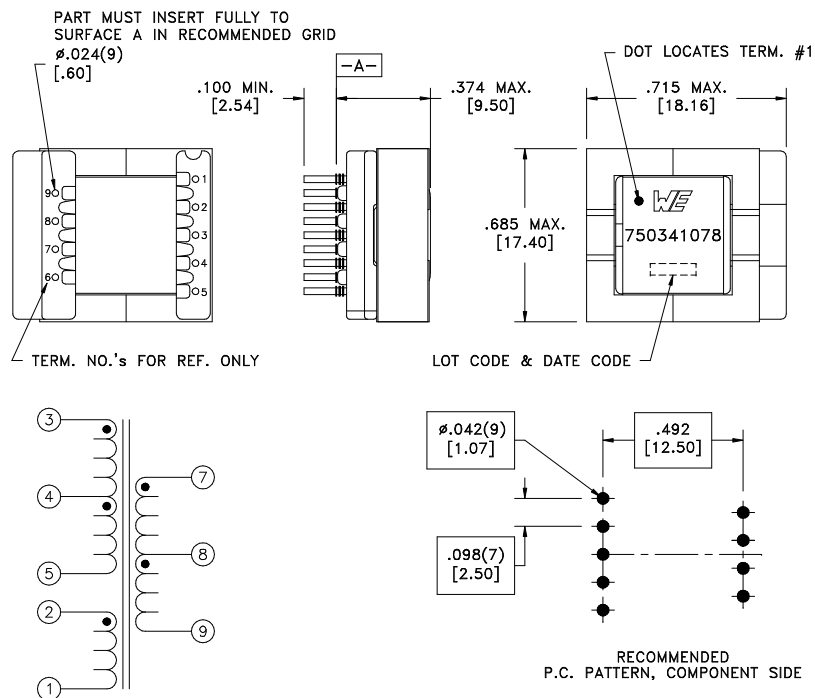

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

| | | | | | | |
|------|------|--|----------------------|---|-------------------------------------|---|
| REV. | DATE | Packaging Specifications Method: Tray PKG-0204 www.we-online.com/midcom | | Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [.13] Fractions: $\pm 1/64$ Footprint: $\pm .001$ [.03] | DRAWING TITLE TRANSFORMER | PART NO. 750341078 |
| 6A | 3/12 | SEE REVISION SHEET FOR REVISION LEVEL | CONVENTION PLACEMENT | This drawing is dual dimensioned. Dimensions in brackets are in millimeters. | eiSos p/n: 750341078 | compliant RoHS SPECIFICATION SHEET 1 OF 1 |