Build Up HDI (Standard)

HDI10_2+6(8b)+2_1,50_35_engl

10 - Layers

Core: 0,25 mm Cu 35/35 µm

WE-Articel No.:	**2 + 6(8B) + 2**
Customer:	

WÜRTH ELEKTRONIK

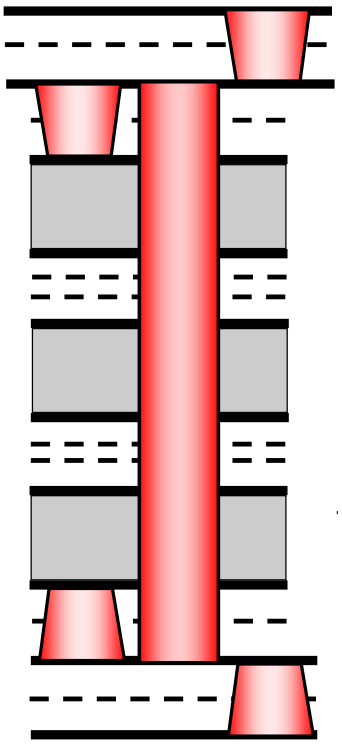

layer description		configuration	Raw-Material	CU	PREPREG	Final Thickness	Customer requirements
Customer	WE					[µm]	[µm]
	TOP/VS		Foil	12 µm	1)	12	
					1 x 1080	60	
	2		Foil	9 µm		30	
					1 x 1080	60	
	3			35 µm		33	
			0,250 mm			250	
	4			35 µm		33	
					2 x 1080	124	
	5			35 µm		33	
			0,250 mm			250	
	6			35 µm		33	
					2 x 1080	124	
	7			35 µm		33	
			0,250 mm			250	
	8			35 µm		33	
					1 x 1080	60	
	9		Foil	9 µm		30	
					1 x 1080	60	
	BOT/RS		Foil	12 µm	1)	12	

1) copper thickness outer layers: appr. 55 µm

final lamination thickness:	**1,50**	+/-	0,13	mm			Date: / Engineer:
thickness with electro plated Cu:	1,59	+/-	0,16	mm			
total thickness with soldermask	1,65	+/-	0,18	mm			
customer requirement		+/-		mm	point:		

total material thickness: 1520

Note: Lamination thickness for Prepregs depending on layout characteristics.

prepared: on	by	checked: on	by	approved: on	by	revision	
27.03.2006	**S. Keller**	04.05.2006	M.Kress	04.05.2006	R.Schönholz	00	page: 15+